



SPECIAL: SOLAR THERMAL SYSTEMS

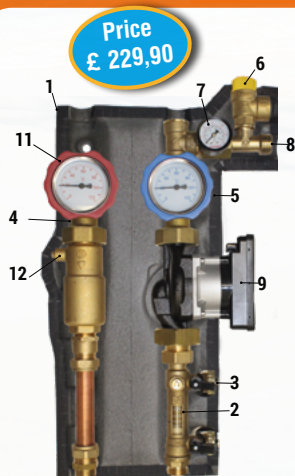

Price
£ 229,90

Art. E.651

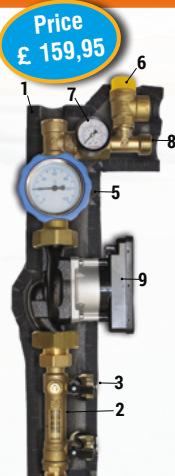

Price
£ 159,95

Art. E.654

1. Rigid thermal insulation in PE.
2. Flowmeter with manual flow rate control.
3. Fill and drain valves.
4. Single-block shut-off valve and check-valve.
5. Return valve with blue handle and integrated thermometer (0-120°C).
6. Safety valve for solar thermal systems pre-calibrated at 6 bar.
7. Manometer (0-10 bar).
8. Expansion vessel connection.
9. High-energy efficiency circulating pump UPMS 25-80.
10. Fixing brackets.
11. Delivery valve with red handle and integrated thermometer (0-120 °C).
12. Manual deaerator.
13. Hose adaptor.

E.651 - Pump groups for solar thermal systems, for delivery and return with insulating shell and wall-fixing brackets. Composed as specifically stated above.

Connections 3/4" M. X 3/4" F. – For connections with copper pipes, please see specific union fittings on page 64 of ANTARES catalog 35 (W).

Temperature control range	2 - 12 lt./min.	8 - 33 lt./min.
Art. code	E.651.15	E.651.35
Price £	229,90	229,90

E.654 - Pump groups for solar thermal systems, return only with insulating shell and wall-fixing brackets. Composed as specifically stated above.

Connections 3/4" M. X 3/4" F. – For connections with copper pipes, please see specific union fittings on page 64 of ANTARES catalog 35 (W).

Temperature control range	2 - 12 lt./min.	8 - 33 lt./min.
Art. code	E.654.15	E.654.35
Price £	159,95	159,95

Circulator for high-efficiency solar thermal systems



Price 4 YEARS
£ 54,25 WARRANTY

P.023

Circulation pump ANTARES type MODULEX SOLAR, high-efficiency, with PWM2 or PWM1, self-regulating with or without PWM cable connection. SPECIFICALLY SUITABLE FOR SOLAR SYSTEMS.

Max. flow rate: 4.6 m³/h. Self-regulating. Meets all circulation pump requirements in a single product. Complete with gaskets, power cable and PWM signal cable. Power supply 230 Vac. - 4-year warranty.

Art. code	"Solar" type	Max. head	Height H	Connections Ø	W	Price
P.023.99	UPMS 15-90-130	9 mt.	130	1" M.	90	54,95
P.023.90	UPMS 25-90-130	9 mt.	130	1 1/2" M.	90	55,25
P.023.98	UPMS 25-90-180	9 mt.	180	1 1/2" M.	90	55,95



Art. C.069

Price
£ 73,45

C.069 - Control kit for solar thermal systems composed of diverting valves (Art. C.067) and mixing valves (Art. C.065). Temperature control 30-65°C.

Connections with 3-piece M. fittings on valves and M. outlet. Complete with insulating shell.

Connections	1/2" M.	3/4" M.
Flow rate lt./h	1.620	2.100
Art. code	C.069.02	C.069.03
Price £	73,45	91,25

Price
£ 13,95

Temperature
and Pressure



Art. E.033

E.033 - Combined temperature and pressure safety valve for protection of storage tanks.

Suitable for domestic hot water, vertical and horizontal installation only with discharge facing downward. Compliant with PED 97/23/EC. Discharge temperature: 92°C (+3°C).

Art. code	Connections Ø	Set pressure	Price £
E.033.27	1/2" M.F.	7 bar	15,55
E.033.34	3/4" M.F.	4 bar	13,95
E.033.37	3/4" M.F.	7 bar	13,95

T.124.00 - Differential thermostat "SUNDIGIT" for solar panels with wall installation and digital display, with three temperature probes.

When the temperature of the solar collectors is higher than that of the boiler water, the thermostat starts the pump, enabling heat exchange. With display of clock time, collector temperature and boiler temperature. Power supply 230 Vac.

Price
£ 49,95



Art. T.124.00



Price
£ 11,25

Art. E.660.10

E.660.10 - Manual vertical air vent for solar systems 1" M. x 3/4" M.



Price
£ 2,45

Art. E.011

E.011 - Brass safety valve for solar systems with oversized discharge.

Max. temperature: 150°C. Anti-freeze glycol up to 50%.

Art. code	Connections Ø	Set pressure	Price £
E.011.12	1/2" F. x 1/2" F.	3 bar	2,45
E.011.32	1/2" F. x 3/4" F.	3 bar	4,35
E.011.33	1/2" F. x 3/4" F.	4 bar	4,25
E.011.36	1/2" F. x 3/4" F.	6 bar	4,15
E.011.62	1/2" F. x 1/2" F.	6 bar	2,85

COLD WATER PUMPING SPECIAL

Well 3"
Ø inner: 75 mm



Art. P.803

Price
starting
from
£ 99,95



Included for
single-phase



Well 4"
Ø inner: 100 mm




Art. P.804

Price
starting
from
£ 119,25



Included for
single-phase

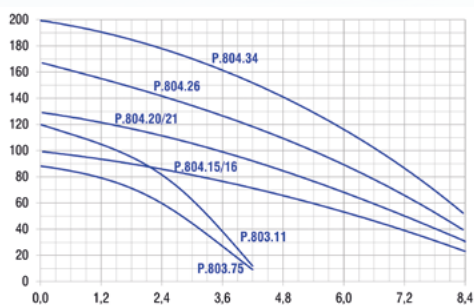

P. 803 – ANTARES stainless steel submersible pump type DEEP PLUS 3SD for deep wells Ø 3" with inner hole max 75 – Outlet fitting : 1 1/4" F.

2-years warranty – Max immersion depth 80 mt. Comes with 2 mt cable and electric control board with condenser. With joint Kit for cable expansion.

Art. code	Voltage	Power		Price £
		KW	HP	
P803.75	Single-phase 230 Vac	0,75	1	99,95

Art. code	Voltage	Power		Price £
		KW	HP	
P803.11	Single-phase 230 Vac	1,1	1,5	120,95

P. 804 – ANTARES stainless steel submersible pump type DEEP PLUS 4SD for deep wells Ø 4" with inner hole max 100 - Outlet fitting : 2" F.

2-years warranty – Max immersion depth 80 mt. Comes with 2 mt cable and electric control board only for single-phase models.

Art. code	Voltage	Power		Price £
		KW	HP	
P804.15	Single-phase 230 Vac	1,5	2	127,45

Art. code	Voltage	Power		Price £
		KW	HP	
P804.16	Three-phase 3x400 Vac	1,5	2	119,25

Art. code	Voltage	Power		Price £
		KW	HP	
P804.20	Single-phase 230 Vac	2,2	3	155,95

Art. code	Voltage	Power		Price £
		KW	HP	
P804.21	Three-phase 3x400 Vac	2,2	3	138,95


Art. code	Voltage	Power		Price £
		KW	HP	
P804.26	Three-phase 3x400 Vac	3	4	159,95

Art. code	Voltage	Power		Price £
		KW	HP	
P804.34	Three-phase 3x400 Vac	4	5,5	229,95



Price
£ 99,95

Art. P.750

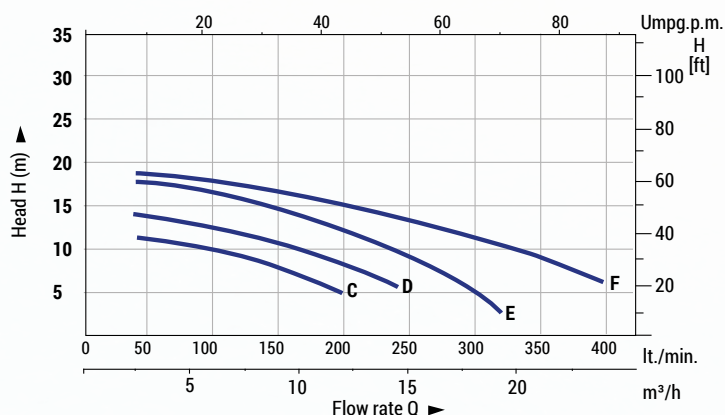

P.750 - Centrifugal pump for filtering of water in pools, complete with inspectable pre-filter.

Suitable for uninterrupted usage. Revolutions 2.850 RPM – Protection level IP44 – Insulation: level B – Aspiration max 9 mt.



Art. code	Curve type	Power supply	Flow rate max lt./m.	Head max m.	kW	Hp	Connections	Price £
P750.09	C	Single-phase 230 Vac	175	12	0,9	1,2	1 1/2" F. x 1 1/2" F.	99,95
P750.11	D	Single-phase 230 Vac	250	15	1,1	1,5	1 1/2" F. x 1 1/2" F.	109,95
P750.15	E	Single-phase 230 Vac	300	19	1,5	2	2" F. x 2" F.	145,95
P750.20	F	Single-phase 230 Vac	420	20	2,2	3	2" F. x 2" F.	149,95
P750.21	F	Three-phase 400 Vac	420	20	2,2	3	2" F. x 2" F.	149,95

SURFACE PUMP with inverter



Price
£ 159,95

Art. P.726

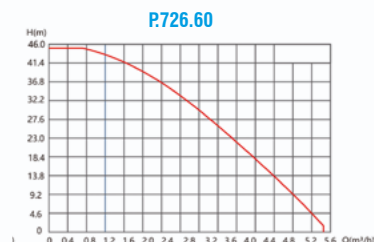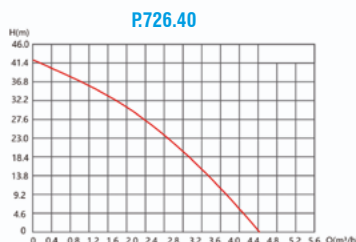

4 in 1

- No expansion vessel
- No manometer
- No pressure switch
- Digital display
- 1" F. x 1" F.
- Inverter: works on the number of revolutions to guarantee the set pressure

P726 - Surface pump with frequency conversion inverter.

Art. code	Power W	Connections Ø inlet x outlet	Price £	Flow rate m³/h	Head max. m
P726.05	550	1" F. x 1" F.	159,95	1	38
				2	30
				3	17
				4	5
P726.08	800	1" F. x 1" F.	189,95	1	47
				2	42
				3	30
				4	17

Price
£ 29,95



P.710

Price
£ 45,95



P.712

Art. code	Description	Price £
P710.05	Peripheral pump ANTARES HP 0,5 - KW 0,37	29,95
P710.10	Peripheral pump ANTARES HP 1 - KW 0,75	46,95
P712.05	Centrifugal pump ANTARES HP 0,5 - KW 0,37	45,95
P712.10	Centrifugal pump ANTARES HP 1 - KW 0,75	74,95
P712.15	Centrifugal pump ANTARES HP 1,5 - KW 1,1	113,35



Art. P.715

Price
£ 69,95

P.715 - Self-priming surface pump. 2-years warranty.

With cast iron body, bronze impeller and stainless steel shaft. Max suction 9 m. Connections 1" F. x 1" F. Power supply: 230 V, 50 Hz. Single-phase with built-in thermal motor protection.

Art. code	KW	HP	Price £	Flow rate lt./min.			
				10	20	30	40
P715.80	0,60	0,8	69,95	Manometric head H (m)			
Art. code	KW	HP	Price £	Flow rate lt./min.			
				10	20	30	40
P715.10	0,75	1	75,95	Manometric head H (m)			



Price
£ 1,95

Art. D.001

Manometer

Art. code	Diam. mm	Ø Connection	Pressure bar	Price £
D.001.41	40	1/4" M. Radial	0÷4	1,95
D.001.51	50	1/4" M. Radial	0÷10	2,15
D.001.54	50	1/4" M. Radial	0÷6	2,15



Price
£ 3,85

D.007

Bipolar pressure switch "BARCONTROL" for autoclave, adjustable from 1,4 to 4,6 bar. Connection 1/4" F.

Art. code	Factory calibration	Price £
D.007.05	From 1,4 to 2,8 bar	3,85
D.007.06	From 2,0 to 3,5 bar	3,85
D.007.07	From 2,7 to 4,2 bar	3,85

Price
£ 17,95



D.028.00

Electronic flow-pressure switch for automatic pressure regulation in water systems served by an electric pump and for dry-run protection. Complete with pressure gauge.

Connections: 1" M. x 1" M.
Power supply: 220/240 V.
IP65 Protection.

HEAT PUMP INSTALLATION SPECIAL



On ground supports


Price
£ 10,95



Art. F.390

F390 - Pack of 4 anti vibration supports for insulation of heat pumps, generators, air conditioners and pumping groups. Can be used on ground supports.


Art. code	Max weight kg	Price £
F390.15	150	10,95
F390.30	300	11,45
F390.45	450	11,95

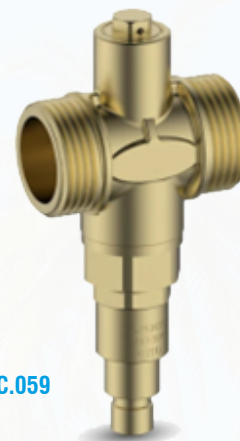

C.059

Price
£ 34,95

The ANTARES antifreeze valve allows discharge of the circuit fluid when its temperature reaches an average value of 3°C. It prevents ice formation in the system circuit, avoiding possible damage to the unit and to the circuit components.

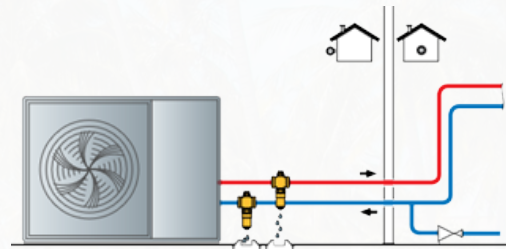

Art. C.059 – ANTARES antifreeze valve in brass with opening temperature: 3 °C and closing temperature: 4.5 °C.

M. x M. connections. - PN 10.

Art. code	Connections Ø	Price £
C.059.10	1" M x 1" M	34,95
C.059.14	1 1/4" M x 1 1/4" M	35,25
C.059.12	1 1/2" M x 1 1/2" M	39,95
C.059.28	Ø 28 x Ø 28	38,45



On wall-brackets or ground supports

Price
£ 19,95



Art. F.392


F392 - Pack of 4 anti vibration supports for insulation of heat pumps, generators, air conditioners and pumping groups. Can be used on wall-brackets or ground support.

Art. code	Max weight kg	Price £
F392.55	55	19,95
F392.80	80	21,00



On wall-brackets or ground supports

Price
£ 14,95



Art. F.394


F394 - Pack of 4 anti vibration supports for insulation of heat pumps, generators, air conditioners and pumping groups with screws and bolts. Can be used on wall-brackets or ground supports.

Art. code	Max weight kg	Price £
F394.10	100	14,95
F394.20	200	15,25
F394.35	350	15,95

BOILER SPARE PARTS SPECIAL



Art. P.031.66

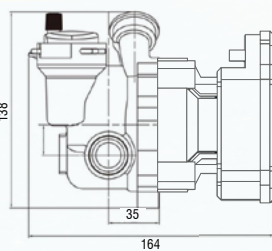

Compatible interchangeable
ARISTON - TACO 325 Vdc with PWM

For Altea One NET, Cares Premium, Cares S., Cares X, Clas One, Clas X boilers. Genus One. Ref. 65116908-03

325 Vdc

4-YEAR WARRANTY

Art. P.031.66 - ANTARES circulation pump with plastic body, with air separator and automatic air vent, 325 Vdc DC with PWM, compatible with ARISTON boilers - with connection cables.

Compatible with Ariston reference codes: 65116908-03 - 65116908.
Compatible with TACO ES 2PK/53-9A-C - 325 VDC.

Price £ 61,45



COMPATIBLE WILO
CALEFFI AND GRUNDFOS

Art. P.087.00 - Replacement automatic air separator head for circulation pumps with plastic body and bayonet coupling.

Compatible: Caleffi, Wilo, Grundfos.

Reference codes: IMMERGAS: 1027110 - BAXI: 710493600.

Price £ 2,45



FOR SPARE MOTORS WITH FREQUENCY-MODULATED IMPELLER WITH PWM CONTROL
See Art. P.121 - P.122
Page 10 - 11 ANTARES FIRE Catalogue
Page 8 - 9 Circulators brochure

uk@antaresint.com

PROMOTION VALID THROUGH 31 AUGUST 2026

Whatsapp: +44 1227 458 684



ANTARES

for water & fire 35 Marine Terrace - Margate, Kent, CT9 1XJ

Telephone & WhatsApp +44 1227 458 684 - internet: www.antaresint.com - e-mail: uk@antaresint.com