



SPECIAL: SOLAR THERMAL SYSTEMS

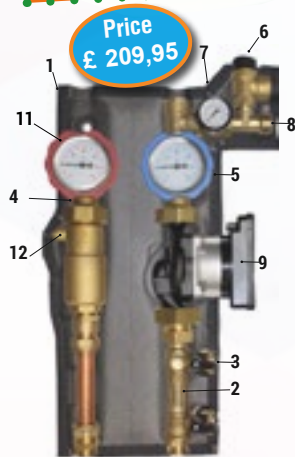

Price
£ 209,95

Art. E.651

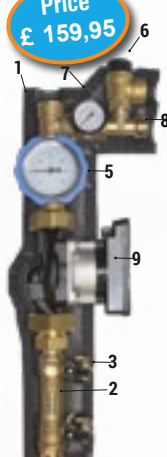

Price
£ 159,95

Art. E.654

1. Rigid thermal insulation in PE.
2. Flowmeter with manual flow rate control.
3. Fill and drain valves.
4. Single-block shut-off valve and check-valve.
5. Return valve with blue handle and integrated thermometer (0-120°C).
6. Safety valve for solar thermal systems pre-calibrated at 6 bar.
7. Manometer (0-10 bar).
8. Expansion vessel connection.
9. High-energy efficiency circulating pump UPMS 25-80.
10. Fixing brackets.
11. Delivery valve with red handle and integrated thermometer (0-120 °C).
12. Manual deaerator.
13. Hose adaptor.

E.651 - Pump groups for solar thermal systems, for delivery and return with insulating shell and wall-fixing brackets. Composed as specifically stated above.

Connections 3/4" M. X 3/4" F. – For connections with copper pipes, please see specific union fittings on page 64 (W).

Temperature control range	2 - 12 lt./min.	8 - 33 lt./min.
Item code	E.651.15	E.651.35
Price £	209,95	209,95

E.654 – Pump groups for solar thermal systems, return only with insulating shell and wall-fixing brackets. Composed as specifically stated above.

Connections 3/4" M. X 3/4" F. – For connections with copper pipes, please see specific union fittings on page 64 (W).

Temperature control range	2 - 12 lt./min.	8 - 33 lt./min.
Item code	E.654.15	E.654.35
Price £	159,95	159,95

Circulator for high-efficiency solar thermal systems



PWM 1 - 2

Price 4 YEARS
£58,65 WARRANTY

P.023

ANTARES high-energy efficiency circulating pump type MODULEX SOLAR with frequency modulation inverter and with parametrizable PWM2 or PWM1 control socket, equipped with SELF ADAPT function, self-regulating with or without PWM cable connection. Especially suited for solar thermal systems.

Max flow rate: m3/h 3,3. Self-regulating. Satisfies every need of a circulator in one single product. Comes with gasket, power supply cable and PWM cable socket. Power supply 230 Vac. 4-years warranty.

Item code	Type "Solar"	Head max.	Height H	Connections Ø	W	Price
P.023.89	UPMS 15-80-130	8 mt.	130	1" M.	65	58,65
P.023.80	UPMS 25-80-130	8 mt.	130	1 1/2" M.	65	59,85



Price
£ 89,95

Art. C.069

C.069 - Control kit for solar thermal systems composed of diverting valves (Art. C.067) and mixing valves (Art. C.065). Temperature control 30-65°C.

Made for solar thermal systems to deviate the fluid according to the instantaneous temperature and to give an adequate use control. Connection with 3 pieces fittings M. on valves and outlet M. – Deviator pre-calibrated at 45 °C. Comes with insulating shell.

Connections	1/2" M.	3/4" M.
Flow rate lt./h	1.620	2.100
Item code	C.069.02	C.069.03
Price £	89,95	108,85



E.033

Price
£ 13,95

Temperature and Pressure

E.033 - Combined safety valve temperature and pressure to protect the storage tanks.

Suitable for domestic water, vertical installation and horizontal with downwards drain. In accordance to PED 97/23/CE. Drain temperature: 92°C(+3 °C).

Item code	Connections Ø	Calibration pressure	Price £
E.033.27	1/2" M.F.	7 bar	15,55
E.033.34	3/4" M.F.	4 bar	13,95
E.033.37	3/4" M.F.	7 bar	13,95

T.124.00 - Differential thermostat "Sundigit" for solar panels with wall installation and digital display, with three temperature probes.

When the panels' temperature is higher than the temperature of the water in the boiler, the thermostat starts the pump which allows the heat exchange between panels and boiler. With clock display, manifold and heater temperature. Manifold: 0°- 200°C. Heater: 0°-100°C. Power supply: 230 Vac. Contacts outlet for pump and boiler: 5A – Dimensions: 131 x 88 x (H) 27,2. Probes can be connected up to 100 mt.

Price
£ 49,95



T.124.00



Price
£ 11,25

E.660.10

Manual vertical air vent for solar systems 1" M. x 3/4" M.



Price
£ 2,85

E.011

E.011 - Brass safety valve for solar thermal systems, with female inlet and female increased discharge outlet. CE approved.

Max. temperature 150°C. Suitable for water mixed with antifreeze glycol up to 50%, as of DIN 4757.

Item code	Connections Ø	Calibration pressure	Price £
E.011.12	1/2" F. x 1/2" F.	3 bar	2,95
E.011.32	1/2" F. x 3/4" F.	3 bar	4,45
E.011.33	1/2" F. x 3/4" F.	4 bar	4,25
E.011.36	1/2" F. x 3/4" F.	6 bar	4,15
E.011.62	1/2" F. x 1/2" F.	6 bar	2,85

SPECIAL COLD WATER PUMPING



Well 3"

Ø inner: 75 mm



P803

Price starting from £ 99,95



Included for Single-phase



Well 4"

Ø inner: 100 mm



P804

Price starting from £ 119,25



Included for Single-phase



P. 803 – ANTARES stainless steel submersible pump type DEEP PLUS 3SD for deep wells Ø 3" with inner hole max 75 – Outlet fitting : 1 1/4" F.

2-years warranty – Max immersion depth 80 mt. Comes with 2 mt cable and electric control board with condenser. With joint Kit for cable expansion.

Item code	Voltage	Power		3SDM 2,5/22 Price £
		KW	HP	
P803.75	Single-phase 230 Vac	0,75	1	99,95

Item code	Voltage	Power		3SDM 2,5/30 Price £
		KW	HP	
P803.11	Single-phase 230 Vac	1,1	1,5	120,95

P. 804 – ANTARES stainless steel submersible pump type DEEP PLUS 4SD for deep wells Ø 4" with inner hole max 100 - Outlet fitting : 2" F.

2-years warranty – Max immersion depth 80 mt. Comes with 2 mt cable and electric control board only for single-phase models.

Item code	Voltage	Power		4SDM6/16 Price £
		KW	HP	
P804.15	Single-phase 230 Vac	1,5	2	127,45


Item code	Voltage	Power		4SD6/16 Price £
		KW	HP	
P804.16	Three-phase 3x400 Vac	1,5	2	119,25

Item code	Voltage	Power		45SM6/21 Price £
		KW	HP	
P804.20	Single-phase 230 Vac	2,2	3	155,95

Item code	Voltage	Power		4SD6/21 Price £
		KW	HP	
P804.21	Three-phase 3x400 Vac	2,2	3	138,95


Item code	Voltage	Power		4SD6/26 Price £
		KW	HP	
P804.26	Three-phase 3x400 Vac	3	4	159,95

Item code	Voltage	Power		4SD6/34 Price £
		KW	HP	
P804.34	Three-phase 3x400 Vac	4	5,5	229,95

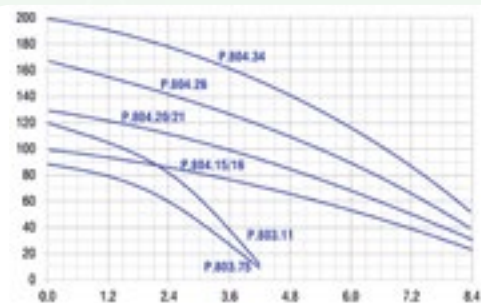

Price £ 99,95

P750

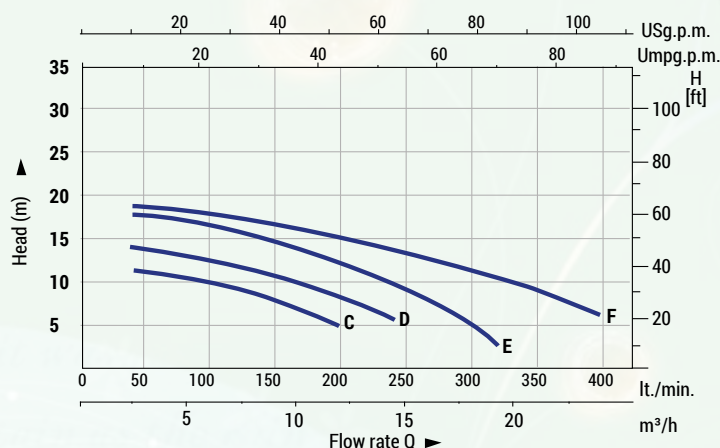

P750 - Centrifugal pump for filtering of water in pools, complete with inspectable pre-filter.

Suitable for uninterrupted usage. Revolutions 2.850 RPM – Protection level IP44 – Insulation: level B – Aspiration max 9 mt.

Item code	Curve type	Power supply	Flow rate max lt/m.	Head max m.	kW	Hp	Connections	Price £
P750.09	C	Single-phase 230 Vac	175	12	0,9	1,2	1 1/2" F. x 1 1/2" F.	99,95
P750.11	D	Single-phase 230 Vac	250	15	1,1	1,5	1 1/2" F. x 1 1/2" F.	109,95
P750.15	E	Single-phase 230 Vac	300	19	1,5	2	2" F. x 2" F.	145,95
P750.20	F	Single-phase 230 Vac	420	20	2,2	3	2" F. x 2" F.	149,95
P750.21	F	Three-phase 400 Vac	420	20	2,2	3	2" F. x 2" F.	149,95



Automatic lifting pump with inverter


4 in 1

- No storage vessel
- No manometer
- No pressure switch
- Inverter: works on the number of revolutions to guarantee the set pressure

Price
£ 189,95



P.726.08

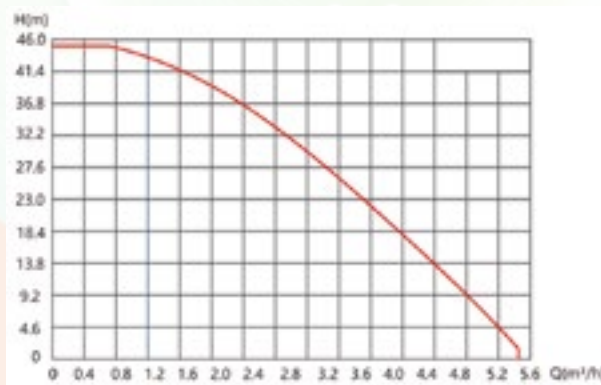

- 800W $\approx$ 1,1 HP
- 1" F. x 1" F.
- Digital display

Price
£ 34,55



P.710

Price
£ 52,65



P.712

Item code	Description	Price £
P.710.05	Peripheral pump ANTARES HP 0,5 - KW 0,37	34,55
P.710.10	Peripheral pump ANTARES HP 1 - KW 0,75	54,95
P.712.05	Centrifugal pump ANTARES HP 0,5 - KW 0,37	52,65
P.712.10	Centrifugal pump ANTARES HP 1 - KW 0,75	78,85
P.712.15	Centrifugal pump ANTARES HP 1,5 - KW 1,1	118,15

Price
£ 76,45



P.715

Self-priming lifting pump. 2-years warranty.

Cast-iron body, bronze impeller and stainless steel shaft. Aspiration max 9 mt. Connections 1" F. x 1" F. Power supply: 230 V, 50 Hz. Single-phase with incorporated thermal motor protector.

Item code	KW	HP	Price £	Flow rate lt./min.			
				10	20	30	40
P.715.80	0,60	0,8	76,45	Manometric head H (m)			
Item code	KW	HP	Price £	Flow rate lt./min.			
				10	20	30	40
P.715.10	0,75	1	79,95	Manometric head H (m)			

Price
£ 1,95



D.001

Manometer

Art. code	Diam. mm	Ø Connections	Pressure bar	Price £
D.001.41	40	1/4" M. Radial	0÷4	1,95
D.001.51	50	1/4" M. Radial	0÷10	2,15
D.001.54	50	1/4" M. Radial	0÷6	2,15

Price
£ 3,85



D.007

Bipolar pressure switch "BARCONTROL" for autoclave, adjustable from 1,4 to 4,6 bar. Connection 1/4" F.

Item code	Factory calibration	Price £
D.007.05	From 1,4 to 2,8 bar	3,85
D.007.06	From 2,0 to 3,5 bar	3,85
D.007.07	From 2,7 to 4,2 bar	3,85

Price
£ 17,95



D.028.00

Electronic pressure flow switch for automatic adjustment of pressure in water systems supplied by an electropump, and for protection against water shortage. Comes with manometer. Connections: 1" M. x 1" M. power supply: 220/240 V. Protection level: IP65.

SPECIAL PROMO BOILER INSTALLATION



E.338.40

Price
£ 29,65



E.338.40 - Kit of extensible stainless steel flex hoses from 220 mm to 400 mm, for gas boiler connection.

Composed for:

- N°1 yellow plastic flex DN 20 connections 3/4" F. swiv. x 3/4" M. for gas with NBR gasket compliant to EN 549.
- N° 2 flex DN 20 connections 3/4" F. swiv. x 3/4" M. per water heating with Fasit gaskets..
- N° 2 flex DN 12 connections 1/2" F. swiv. x 1/2" M. for domestic warer with Fasit gaskets.

STAINLESS STEEL COVERED, EXTENSIBLE

E.330 - Stainless steel extensible flex, white-covered, compliant with standards for various connections.

Item code	Diameter mm	Connections	Extensible length from		Price £
			Min. mm	Max. mm	
E.330.01	12	1/2" M. x 1/2" F.	90	130	3,45
E.330.02	12	1/2" M. x 1/2" F.	110	200	3,85
E.330.03	12	1/2" M. x 1/2" F.	220	400	4,25
E.330.22	20	3/4" M. x 3/4" F.	110	200	5,45
E.330.23	20	3/4" M. x 3/4" F.	220	400	6,25



E.330

Price
starting from
£ 3,45

STAINLESS STEEL COVERED, EXTENSIBLE

E.333



Price
starting from
£ 3,95

E.333 - Stainless steel extensible flex, yellow-covered, compliant with standards for various gas piping connections compliant to UNI 11353. With gasket.

Item code	Ø mm	Connections	Extensible length from		Price £
			Min. mm.	Max mm.	
E.333.02	12	1/2" M. x 1/2" F.	110	200	3,95
E.333.03	12	1/2" M. x 1/2" F.	220	400	4,95
E.333.21	20	3/4" M. x 3/4" F.	90	130	5,25
E.333.22	20	3/4" M. x 3/4" F.	110	200	5,55
E.333.23	20	3/4" M. x 3/4" F.	220	400	7,15



B.000

Price
starting from £ 3,75



B.000 - Gas filter for domestic installations, in inspectionable aluminium.

Prevents passage of dust particles or residues, protecting safety and control devices, compliant to DIN - DVGW. Max pressure: 2 bar.

Diameter Ø	1/2"	3/4"	1"
Item code	B.000.02	B.000.03	B.000.04
Price £	3,75	3,85	3,95



B.002

Price
starting from £ 11,25

B.002 - Aluminium pressure stabilizer for gas, compliant to European directives.

Max pressure: inlet 500 mbar - outlet from 10 to 30 mbar.

Diameter Ø	1/2" F.F.	3/4" F.F.	1" F.F.
Item code	B.002.02	B.002.03	B.002.10
Price £	11,25	11,95	12,25



SPECIAL PROMO BOILERS




Unit price
starting from £ 1,99

C.095

C.095 - Pack of 5 magnesium alloy sacrificial anodes for cathodic protection of heaters and hot water heaters.

Item code	Diameter Ø	Connection thread	Length mm.	Price £
C.095.16	16	M. 4 x 0,7	600	10,65
C.095.30	22	M. 8	300	9,95
C.095.40	22	M. 8	400	13,45
C.095.50	22	M. 8	500	16,85

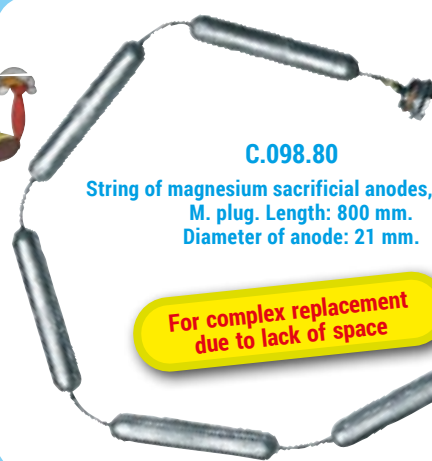

C.098.80

String of magnesium sacrificial anodes, with 3/4" M. plug. Length: 800 mm. Diameter of anode: 21 mm.

Price
£ 13,85

For complex replacement
due to lack of space



Price
£ 19,85

C.085.03

C.085.03 - DEPDIRTY magnetic dirt separator 3/4" in compact technopolymer suitable for installation below wall boilers, with attraction magnet and mud and dirt elimination in water circuits, with collection in special container to be periodically removed through drain tap.

Complete with removable ferromagnetic cartridge, pipe coupling with F. swivel, shut-off ball valve for an easy removal of residues without draining the system.



Price
£ 39,95

C.200.01

Kit for boiler protection composed of:
1 polyphosphate dispenser with cartridge (Art. C.103.32)
1 dirt separator (Art. C.085.03)
1 acid neutraliser filter (Art. C.110.02)



Price
£ 14,95

C.103.32

Polyphosphate dispenser complete with cartridge of 80 gr polyphosphate. With shut-off valve.

Limescale inhibitor. Brass connection Ø 1/2" F. swivel.



Price
£ 3,75

C.104.52



Price
£6,75

C.110.02



Price
£ 20,95

C.100

C.100 - Polyphosphate dispenser, limescale inhibitor.

Polyphosphate dispenser complete with cartridge of 80 gr polyphosphate. With shut-off valve.

Item code	Diameter Ø	Flow rate lt./h.	Price
C.100.03	3/4"F.	700	20,95
C.100.20	1"F.	1.500	27,95



Price
£ 4,75

C.101

C.101 - Limescale inhibitor polyphosphate pack.

Pack of	1/2 Kg.	2 Kg.	5 Kg.
Item code	C.101.12	C.101.02	C.101.00
Price £	4,75	14,45	33,95



Price
£ 1,95

C.112.03

Pack of 250 gr. of refill balls for filter



SPECIAL

Until 20/06/2025

PROMO FOR BOILERS SPARE PARTS



BAXI - ROCA

Price
£ 26,95

S.096.00

S.096.00 - Heat exchanger brazed stainless steel 20-plates compatible with boilers BAXI - ROCA and others.

Manufacturer reference: 129.400.011



S.005

Price
£ 25,95

S.005 - ALFAMAX heat exchanger type XS 208 x 75 instantaneous, with brazed stainless steel plates, with rapid stud connections.

Item code	N° Plates	Price £
S.005.70	12	25,95
S.005.84	14	28,75
S.005.66	16	31,65



S.004

Price
£ 26,65

S.004 - ALFAMAX heat exchanger type XS 208 x 75 instantaneous, with brazed stainless steel plates, with threaded connections.

Item code	N° Plates	Price £
S.004.52	12	26,65
S.004.74	14	29,65
S.004.76	16	32,45



Price
£ 24,65

S.095

S.095 - Heat exchanger with stainless steel plates with fixing fins compatible with boilers VIESSMANN.

Item code	N° Plates	Price £
S.095.16	16	24,65
S.095.18	18	25,85
S.095.20	20	27,35
S.095.24	24	31,95

VAILLANT



S.060.14

14-plates heat exchanger for VAILLANT
With fixing plate

Price
£ 32,95

Price
£ 44,95

VIESSMANN



S.091.16

16-plate heat exchangers for VIESSMANN boilers

Of various types Vitodens 222 WS2, Vitodens 333 WS3A/B/C, plate fixing.

For our full range of heat exchangers please download our heat exchangers booklet from our website



Compatible HONEYWELL

Price
£ 6,95



R.428

"PRESSAIR" air/gas differential pressure switch for boilers compatible "HONEYWELL" C6065.

Item code	HONEYWELL compatible model	mbar		Price £
		on	off	
R.428.06	C6065A 1002	0,59	0,44	6,95
R.428.28	C6065A 1028	0,39	0,15	6,95
R.428.05	C6065A 1135	0,51	0,39	6,95
R.428.90	C6065A 1390	0,49	0,34	6,95

Compatible CALEFFI - GRUNDFOS

Price
£ 2,35



P.088.00

Plastic spare plug for circulators deaerators compatible CALEFFI, GRUNDFOS and ANTARES

Compatible CALEFFI - GRUNDFOS

Price
£ 3,65



E.000.03

Antares brass deaerator, medium-capacity. 3/8" M. H 47 x Ø 44 mm.

BERETTA - VOKERA - RIELLO IMMERGAS and other brands



Price
£ 2,85

Connection
Ø 20

E.237.02

Safety valve with fast connection Ø 20 with O-ring, drain connection 1/2" F. - 3 bar.



Price
£ 2,95

E.010

Brass safety valve CE compliant. Calibrated 3 bar.

Item code	Connections Ø	Price £
E.010.32	1/2" F.	3,35
E.010.93	1/2" M.	2,95

CALEFFI - SIME AND OTHER BRANDS
Connection Ø 20

Price
£ 2,25



E.242.20

Plastic safety valve with fast connection Ø 20 mm., with O-ring, drain connection 1/2" M. - 3 bar.

ARISTON - CHAFFOTEAU

Price
£ 3,25



E.230.01

Plastic safety valve with fast connection Ø 14 and threaded drain outlet 3/8" M. for boilers ARISTON - CHAFFOTEAU and other brands - 3 bar.

Connection Ø 20 to SQ SAUNIER DUVAL

Price
£ 2,35



E.241.20

Plastic safety valve, 3 bar, at right angle with fast connection Ø 20 with O-ring, drain connection Ø 20, for boilers SAUNIER DUVAL, rif. 0020078632.